

PALACE

RLM Signature Series



CONSTRUCTION

- Heavy-gauge spun metals
- Multiple gooseneck designs available
- Indoor and outdoor use

LAMP

- Standard 20W LED 4000K CCT
- 150W maximum incandescent (Lamp not included)
- 163 lm/watt with Lifespan of 50,000 hours

POWER SOURCE

- Electronic LED driver, 0-10V dimmable UNV 120/277V

APPROVALS

- ETL
- CSA Certified



ORDERING LOGIC

SS-PALACE-I-H-150-1-DC-AL-GSC-WH

SERIES	LAMP TYPE	OUTPUT	WATTAGE	VOLTAGE	MOUNTING OPTIONS		MATERIAL	GLOBE	FINISH
SS-PALACE	L LED	H High	LED	1 120V	DC Drop Cord	GOOSENECK¹	AL Aluminum	GSC Glass Clear	WH White
	I Incandescent	N Normal	15 15W	2 277V	S Swivel Stem	C1 C1	BR Brass	GSO Glass Opal	AG Gray
			20 20W	3 347V	W Wall Custom	C2 C2	CP Copper	GPC Glass Prismatic Clear	BK Black
	INCANDESCENT				P Pendant (Straight Stem)	C3 C3	GS Galvanized Steel	GHC Heat Treated Clear Glass	RD Red
					PS Powered Suspension	C4 C4		PPC Polycarbonate Prismatic Clear	BL Blue
						C5 C5	PSC Polycarbonate Smooth Clear	GR Green	
						C Custom	PL PUK Lens	YL Yellow	
								TWH Textured White	
								TBK Textured Black	
								TAL Textured Aluminum	
							CS² Custom Color		
ORDERING NOTES									

ORDERING NOTES

- Standard 3/4" threaded hub
- All RAL Colors Available and other LED CCT

SS-PALACE								
-----------	--	--	--	--	--	--	--	--

SEE NEXT PAGE FOR ACCESSORIES




ACCESSORIES (ORDER SEPARATELY)

SS-PALACE-BP


DIMENSIONS

SERIES	ACCESSORIES
SS-PALACE	PA Pig Tail Adapter AC Air Craft Cables OG Globe Guard (Not Available with Polycarbonate Globes)
SS-PALACE	

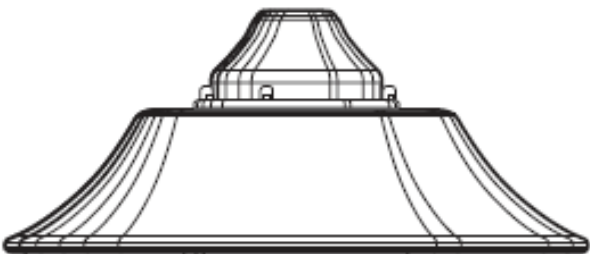

16.000" Diameter

MOUNTING OPTIONS

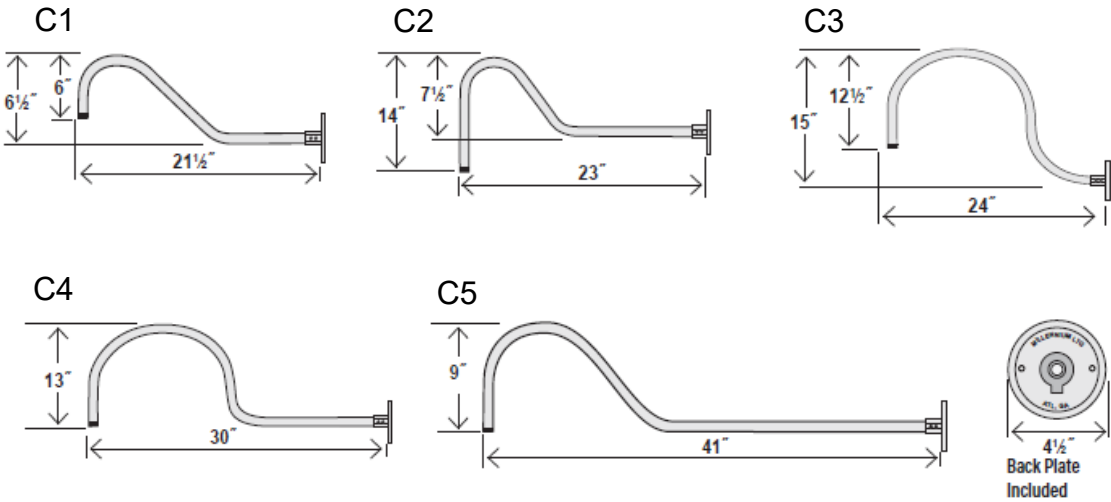

Stems

