



DATE:

PROJECT

COMMENTS:

SUNFIRE

4' Contained Vapor-tight LED.



CONSTRUCTION

- Gasketed enclosures to High Bay and Low Bay applications.
- Gear tray design with symmetric hinging for easy wiring access.
- Frost material with maximum light transmission and minimal

LED pixelation.

- The housing is sealed against dust and moisture.
- Standard housings available with one 7/8" conduit entry point on either or both ends.

LED

- 350W - 70,000 lumens.
- 120/277VAC Universal.
- Efficacy: 185 lm/watt with Lifespan of 50,000 hours.
- Wide CCT ranging from 2700K – 6500K.
- UL Recognized PCB and Components.

APPROVALS

- UL/cUL recognized component.
- Wet Location listed.
- IP65 and IP66.
- Rated for 25° C ambient applications.
- NSF International Certified to NSF/ANSI Standard 2 – Food Equipment; Splash Zone 2.

ORDERING LOGIC

SF-01-4K-C-DD-18-UNV

SERIES	FINISH	LED COLOR/ WATTAGE		MOUNTING	FIXTURE TYPE	LENS	VOLTAGE	
SF	01 White	27K	2700K	C	DD 0-10V Dimmable	09	Clear Lens	
		3K	3000K	S		Stem		
		35K	3500K	AC				Air Craft Cables
		4K	4000K					
		5K	5000K					
		65K	6500K					
SF	01			DD		UNV		

* includes hangers but not the chains



CANLET LIGHTING | CANLET.COM
TEL: 708-499-1700 | FAX: 708-499-3341
5500 W. 111TH STREET OAK LAWN, ILLINOIS 60453

FEBRUARY 20, 2026 | PAGE 1
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.
CONTACT CANLET LIGHTING FOR MOST UP TO DATE DETAILS.

INSTALLATION


Ideal for use in high mounting height environments where dust, dirt, or moisture is present including food processing, cold storage, sports concourses, manufacturing, and industrial.

FEATURES


- Rigid one-piece housing construction.
- Contoured component surfaces reduce the buildup of debris and promote easy cleaning.
- Universal gear tray is symmetrically hinged for easy maintenance access via three steel hinges.
- Gear tray latches to housing via two stainless steel latches.
- Lens secured by 12 stainless steel cam latches. Optional tamper-proof screw also available.
- En-seal™ gasketing provides superior resistance to moisture absorption versus conventional gasketing.

DIMENSIONS

END VIEW

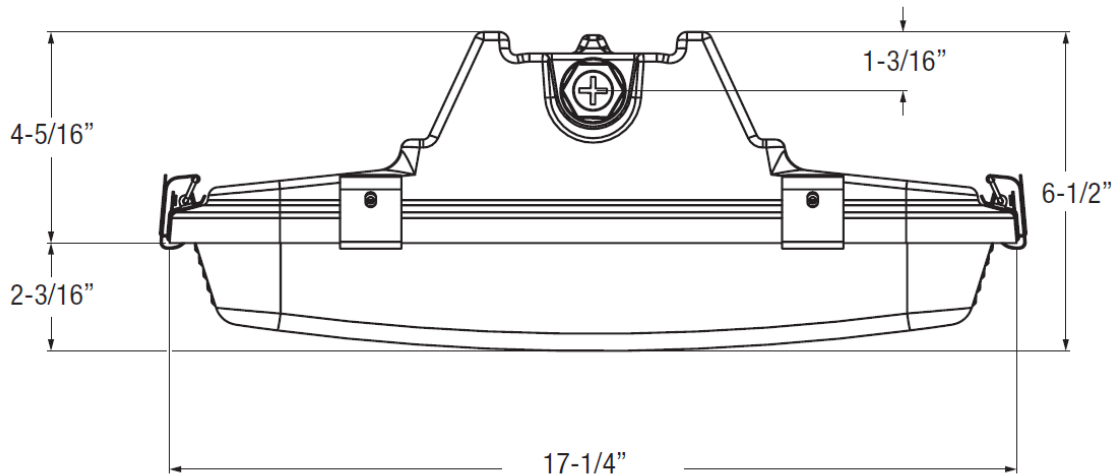

TOP VIEW

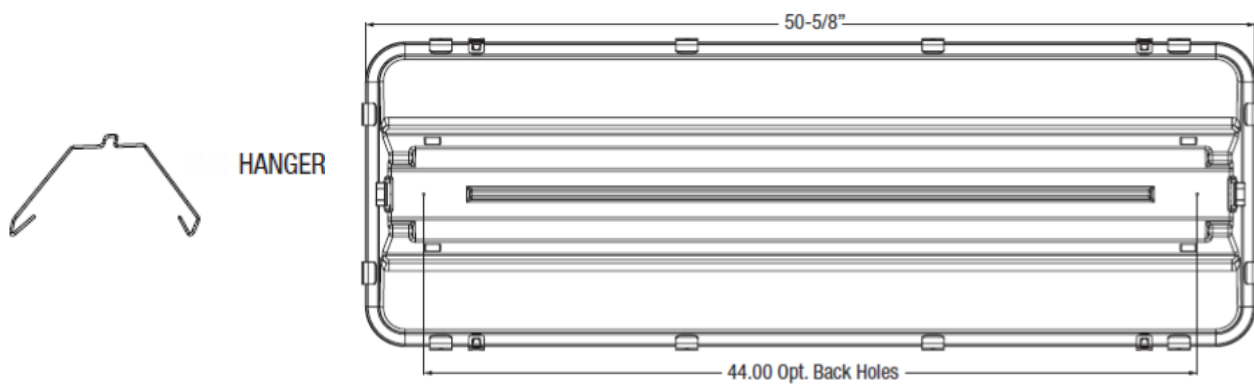

SIDE VIEW

