



DATE:

PROJECT

COMMENTS:

PUK

Contained Vaporproof LED



CONSTRUCTION

- Noncorroding, 30% glass-filled, high impact thermoset polyester housing
- High impact reinforced polymer alloy guard
- Stainless steel screws
- Brass inserts
- Long life silicone gaskets
- ¼ inch thick Lexan clear lens

LED

- 12W or 16W standard integrated LED
- 4000K standard
- CCT available from 2700K to 5000K.
- 80 CRI
- 2592 lm
- Efficacy: 163 lm/watt with Lifespan of 50,000 hours.

OPERATING TEMPERATURE

- -40°C to 93°C, (-40°F to 200°F).

DRIVER

- Constant current
- 0-10V Dimming
- 120V=0.164A / 277V=0.077A
- 15.69% THD at 277V

APPROVALS

- ETL
- CSA Certified
- Buy American Act
- IP66

▪ MRI compatible when order with non-ferrous alloy, (this makes it non-magnetic).

▪ Sauna suitable, (Maximum ambient temperature 200°F)

▪ Marine grade.

ORDERING LOGIC

PUK-01-12W-K35-C-F-NO-09

SERIES	FINISH	WATTAGE	CCT CRI 80	MOUNTING	FIXTURE TYPE	OPTICS	LENS
PUK	01 White	12W 12W (1985 lm)	K27= 2700K	C Ceiling	F With Box (Not Available with Pendant)	NO No Optics	09 Clear Lens
PUK MRI	02 Gray	16W 16W (2592 lm)	K3= 3000k	W Wall	R Retrofit Ring	BE 360°	18 Etched Lens
	03 Black		K35= 3500k	P Pendant			CC Custom Color
	04 Red		K4= 4000k	S Stanchion			
	05 Blue		K5= 5000k	GS Ground Stake			
	06 Green						
	07 Yellow						
PUK							

INSTALLATION

The ceiling box has ¾" threaded hubs with liquid tight knockouts. Internal grounding system allows for hub to hub grounding continuity when using metallic wiring methods (lock nuts are required).

Two mounting feet are spaced 5¼". Pendant mount fixtures have a single ¾" threaded hub with a locking set screw. Use minimum 90°C rated lead wires.



CANLET LIGHTING | CANLET.COM
TEL: 708-499-1700 | FAX: 708-499-3341
5500 W. 111TH STREET OAK LAWN, ILLINOIS 60453

NOVEMBER 3, 2025 | PAGE 1
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.
CONTACT CANLET LIGHTING FOR MOST UP TO DATE DETAILS.

INSTALLATION


The ceiling box has 3/4" threaded hubs with liquid tight knockouts. Internal grounding system allows for hub to hub grounding continuity when using metallic wiring methods (lock nuts are required). Two mounting feet are spaced 5 1/4". Pendant mount fixtures have a single 3/4" threaded hub with a locking set screw. Use minimum 194°F (90°C) rated lead wires.

APPROVALS


- ETL
- CSA Certified
 - C22.2 No. 250.0-08 Luminaires
 - C22.2 No. 250.13-12
- Buy American Act
- IP66
- Patents
 - US Patent No. D767195S1
 - Canadian Design Patent No. 163809
 - Chinese Patent No. 201530303758.8

DIMENSIONS/MOUNTING TYPE


Ceiling Mount

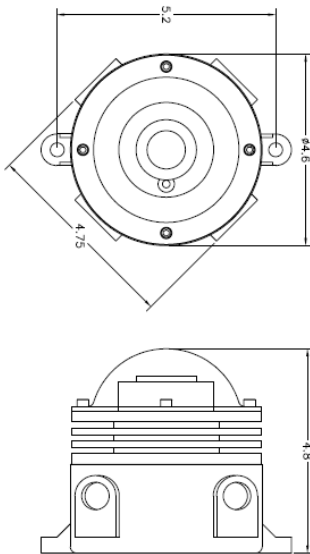

Wall Mount

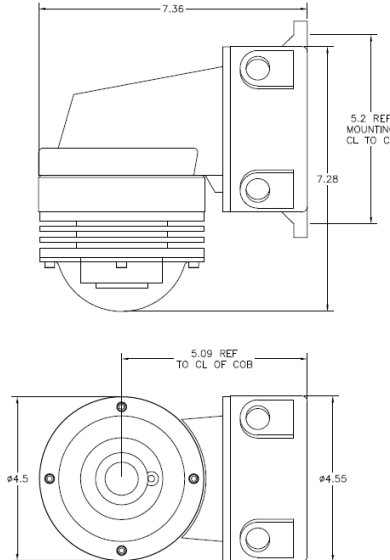

Pendant Mount

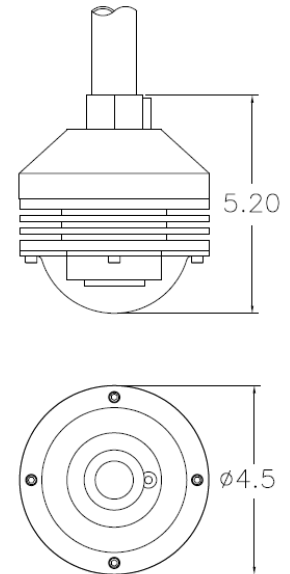

INSTALLATION

The ceiling box has 3/4" threaded hubs with liquid tight knockouts. Internal grounding system allows for hub to hub grounding continuity when using metallic wiring methods (lock nuts are required). Two mounting feet are spaced 5 1/4". Pendant mount fixtures have a single 3/4" threaded hub with a locking set screw. Use minimum 90°C rated lead wires.

