

DATE:

PROJECT:

COMMENTS:

PALACE

RLM Signature Series



CONSTRUCTION

- Heavy-gauge spun metals
- Multiple gooseneck designs available

LAMP

- Standard 20W LED
- 150W maximum incandescent (Lamp not included)
- 32W maximum compact fluorescent (Lamp not included)

POWER SOURCE

- Standard HPF compact fluorescent ballasts
- Electronic LED driver, 0-10V dimmable UNV 120/277V

APPROVALS

- ETL
- CSA Certified




ORDERING LOGIC

SS-PALACE-I-H-150-1-DC-AL-GSC-WH

SERIES	LAMP TYPE	OUTPUT	WATTAGE	VOLTAGE	MOUNTING OPTIONS	MATERIAL	GLOBE	FINISH		
SS-PALACE	L LED	H High	LED	1 120V	DC Drop Cord	GOOSENECK¹	AL Aluminum	GSC Glass Clear	WH White	
	I Incandescent	N Normal	15 15W	2 277V	S Swivel Stem		C1 C1	BR Brass	GSO Glass Opal	AG Gray
	F Fluorescent		20 20W	3 347V	W Wall Custom		C2 C2	CP Copper	GPC Glass Prismatic Clear	BK Black
			INCANDESCENT		P Pendant (Straight Stem)		C3 C3	GS Galvanized Steel	GHC Heat Treated Clear Glass	RD Red
			150 150W Max.		PS Powered Suspension		C4 C4		PPC Polycarbonate Prismatic Clear	BL Blue
			FLUORESCENT				C5 C5	PSC Polycarbonate Smooth Clear	GR Green	
			09 9W				C6 C6	PL PUK Lens	YL Yellow	
			13 13W				C7 C7		TWH Textured White	
			18 18W				C8 C8		TBK Textured Black	
			26 26W				C9 C9		TAL Textured Aluminum	
			32 32W				C10 C10		CS² Custom Color	
			42 42W				C11 C11			
					C Custom					

ORDERING NOTES
 1. Standard 3/4" threaded hub
 2. All RAL Colors Available



SEE NEXT PAGE FOR ACCESSORIES

PALACE

RLM Signature Series




ACCESSORIES (ORDER SEPARATELY)

SS-PALACE-BP

DIMENSIONS

SERIES	ACCESSORIES
SS-PALACE	BP Back Plate PA Pig Tail Adapter AC Air Craft Cables OG Globe Guard <small>(Not Available with Polycarbonate Globes)</small>
SS-PALACE	

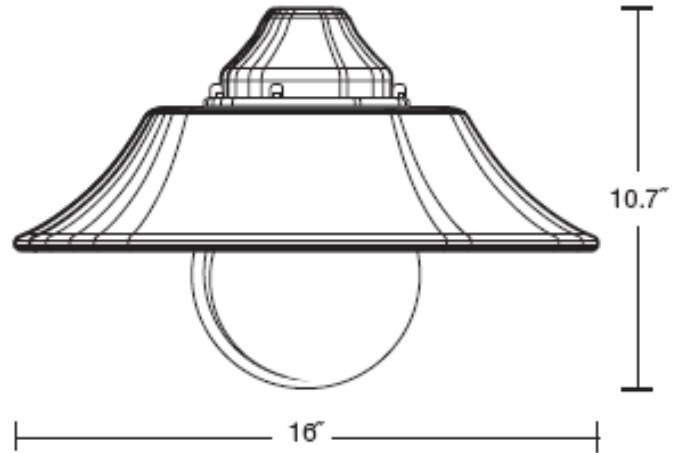

MOUNTING OPTIONS

Mounting Options

Signature Series fixtures can be mounted in a variety of ways, including tough weather resistant cord, braided cord, and a variety of stock goosenecks. Goosenecks can also be custom fabricated to fit any application requirement. Ask your representative for more details.

