



DATE:

PROJECT

COMMENTS:

## CLASSIC

### RLM Signature Series



#### CONSTRUCTION

- Heavy-gauge spun metals
- Multiple gooseneck designs available
- Indoor and outdoor use

#### LAMP


- Standard 20W LED
- CCT available from 2700K to 5000K.
- 150W maximum incandescent (Lamp not included)
- 163 lm/watt with Lifespan of 50,000 hours

#### POWER SOURCE

- LED driver, 0-10V dimmable UNV 120/277V

#### APPROVALS

- ETL
- CSA Certified



#### ORDERING LOGIC

CLASSIC-L-N-150-1-K4-DC-C1-GS-GSO-WH

| SERIES  | LAMP TYPE | OUTPUT         | WATTAGE      | VOLTAGE                      | CCT CRI 80                                                      | MOUNTING OPTIONS |                                   | MATERIAL                     | * GLOBE               | FINISH   |  |  |
|---------|-----------|----------------|--------------|------------------------------|-----------------------------------------------------------------|------------------|-----------------------------------|------------------------------|-----------------------|----------|--|--|
| CLASSIC | L LED     | N Normal       | LED          | 1 120V                       | K27= 2700K<br>K3= 3000k<br>K35= 3500k<br>K4= 4000k<br>K5= 5000k | DC Drop Cord     | GOOSENECK                         | GS Galvanized Steel          | GSC Glass Clear       | WH White |  |  |
|         | I Incand. |                | 15 15W       | 2 277V                       |                                                                 | S Swivel Stem    | C1 C1                             |                              | GSO Glass Opal        | AG Gray  |  |  |
|         |           |                | 20 20W       | 3 347V                       |                                                                 | W Wall           | C2 C2                             | GPC Glass Prismatic Clear    | BK Black              |          |  |  |
|         |           |                | INCANDESCENT |                              |                                                                 |                  | C3 C3                             | GHC Heat Treated Clear Glass | RD Red                |          |  |  |
|         |           |                |              | C4 C4                        |                                                                 |                  | PPC Polycarbonate Prismatic Clear | BL Blue                      |                       |          |  |  |
|         |           |                |              | C5 C5                        |                                                                 |                  | PSC Polycarbonate Smooth Clear    | GR Green                     |                       |          |  |  |
|         |           |                |              | P Pendant<br>(Straight Stem) |                                                                 |                  | PL PUK Lens                       | TWH Textured White           |                       |          |  |  |
|         |           |                |              |                              |                                                                 |                  |                                   |                              | TBK Textured Black    |          |  |  |
|         |           |                |              |                              |                                                                 |                  |                                   |                              | TAL Textured Aluminum |          |  |  |
|         |           |                |              |                              |                                                                 |                  |                                   |                              | CS² Custom Color      |          |  |  |
|         |           | ORDERING NOTES |              |                              |                                                                 |                  |                                   |                              |                       |          |  |  |

#### ORDERING NOTES

1. Standard 1/4" threaded hub
2. All RAL Colors Available

\* Globes not compatible with incandescent lamping

|         |  |   |  |  |  |  |    |  |  |
|---------|--|---|--|--|--|--|----|--|--|
| CLASSIC |  | N |  |  |  |  | GS |  |  |
|---------|--|---|--|--|--|--|----|--|--|

#### SEE NEXT PAGE FOR ACCESSORIES



CANLET LIGHTING | CANLET.COM

TEL: 708-499-1700

5500 W. 111TH STREET OAK LAWN, ILLINOIS 60453


NOVEMBER 3, 2025 | PAGE 1

SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.  
CONTACT CANLET LIGHTING FOR MOST UP TO DATE DETAILS.

ACCESSORIES (ORDER SEPARATELY)

CLASSIC-BP

| SERIES  | ACCESSORIES         |
|---------|---------------------|
| CLASSIC | AC Air Craft Cables |
| CLASSIC | AC                  |

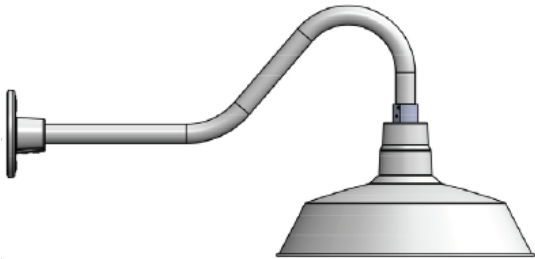

17 Inch Diameter

MOUNTING OPTIONS

Mounting Options

Signature Series fixtures can be mounted in a variety of ways, including tough weather resistant cord, braided cord, and a variety of stock goosenecks. Goosenecks can also be custom fabricated to fit any application requirement. Ask your representative for more details.

