

PALACE

RLM Signature Series



CONSTRUCTION

- Heavy-gauge spun metals
- Multiple gooseneck designs available
- Indoor and outdoor use

LAMP

- Standard 20W LED 4000K CCT
- CCT available from 2700K to 5000K.
- 150W maximum incandescent (Lamp not included)
- 163 lm/watt with Lifespan of 50,000 hours

POWER SOURCE

- Electronic LED driver, 0-10V dimmable UNV 120/277V

APPROVALS

- ETL
- CSA Certified



ORDERING LOGIC

SS-PALACE-I-H-150-1-K4-DC-AL-GSC-WH

SERIES	LAMP TYPE	OUTPUT	WATTAGE	VOLTAGE	CCT CRI 80	MOUNTING OPTIONS		MATERIAL	GLOBE	FINISH
SS-PALACE	L LED	H High	LED	1 120V	K27=2700K	DC Drop Cord	G-NECK ¹	AL Aluminum	GSC Glass Clear	WH White
	I Incand.	N Normal	15 15W	2 277V	K3=3000k	S Swivel Stem	C1 C1	BR Brass	GSO Glass Opal	AG Gray
			20 20W	3 347V	K35=3500k	W Wall Custom	C2 C2	CP Copper	GPC Glass Prismatic Clear	BK Black
			INCANDESCENT		K4=4000k	P Pendant (Straight Stem)	C3 C3	GS Galvanized Steel	GHC Heat Treated Clear Glass	RD Red
			150 150W Max.	K5=5000k	PS Powered Suspension	C4 C4		PPC Polycarbonate Prismatic Clear	BL Blue	
						C5 C5		PSC Polycarbonate Smooth Clear	GR Green	
						C Custom		PL PUK Lens	YL Yellow	
									TWH Textured White	
								TBK Textured Black		
								TAL Textured Aluminum		
					CS ² Custom Color					

ORDERING NOTES

1. Standard 3/4" threaded hub
2. All RAL Colors Available and other LED CCT

SS-PALACE									
-----------	--	--	--	--	--	--	--	--	--

SEE NEXT PAGE FOR ACCESSORIES




ACCESSORIES (ORDER SEPARATELY)

SS-PALACE-BP


DIMENSIONS

SERIES	ACCESSORIES
SS-PALACE	PA Pig Tail Adapter AC Air Craft Cables OG Globe Guard (Not Available with Polycarbonate Globes)
SS-PALACE	

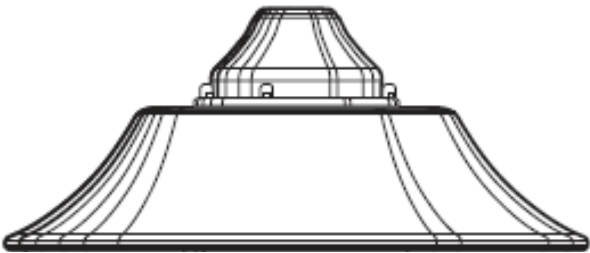

16.000" Diameter

MOUNTING OPTIONS

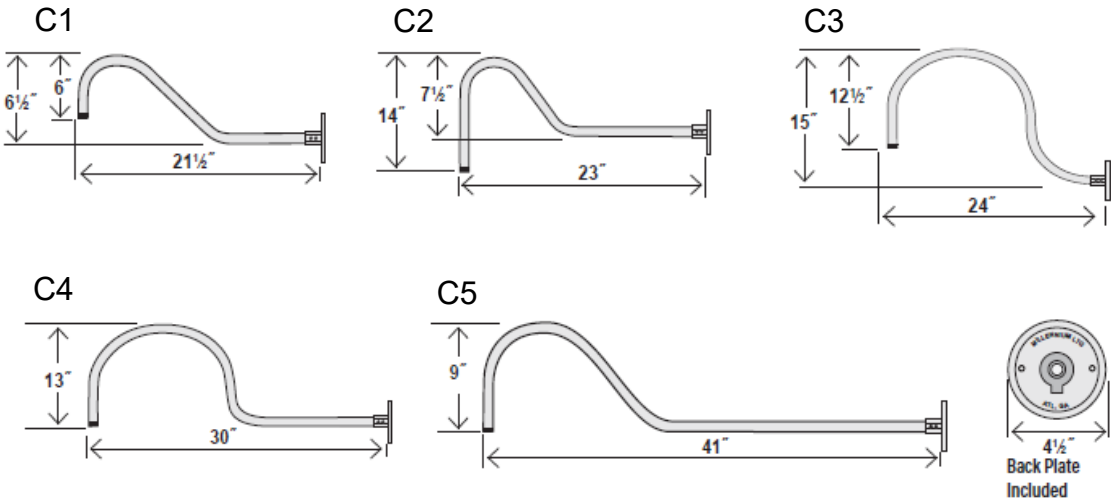

Stems

